


FTBx-2850

μITLA TUNABLE LIGHT SOURCE

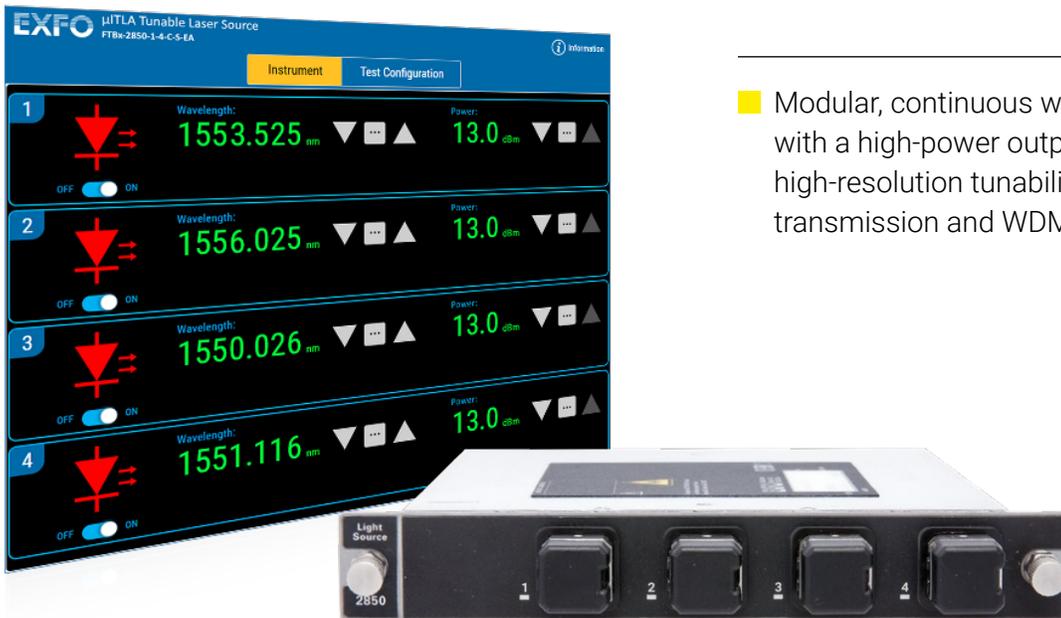

- Modular, continuous wave (CW), tunable laser with a high-power output, narrow linewidth and high-resolution tunability for coherent/OFDM transmission and WDM network emulation.

KEY FEATURES AND BENEFITS

Up to 48 lasers in one LTB-12 platform

Narrow linewidth of less than 100 kHz

1 pm tuning resolution

Up to 15 dBm of output power

Remote PC control via VXI-11 (Ethernet)

RELATED PRODUCTS



Platforms
LTB-2, LTB-8 and LTB-12



Benchtop optical kit
LTK-1

INTEGRATED TUNABLE LASER ASSEMBLY

The FTBx-2850 is a modular, continuous wave (CW), tunable laser with a high-power output, narrow 100 kHz linewidth and 1 pm resolution tunability over the C or L bands. This laser is a cost-effective and versatile solution for various applications, including coherent/OFDM transmission and WDM network emulation.

The LTB-2, LTB-8 and LTB-12 platforms can host FTBx-2850 modules and operate them using a dedicated software. Other FTBx modules from EXFO's optical family of products (e.g., FTBx-3500 variable attenuator, FTBx-1750 high-performance power meter, ...) are handled using ToolBox software, which is not installed on the dedicated LTB-2 and LTB-8 platforms.

Up to two FTBx-2850 modules can be inserted into an LTB-2 platform, for a total of 8 lasers.

Up to eight FTBx-2850 modules can be inserted into an LTB-8 platform, for a total of 32 lasers.

Up to twelve FTBx-2850 modules can be inserted into an LTB-12 platform, for a total of 48 lasers.

Multiple LTB-2, LTB-8 or LTB-12 platforms can be cascaded and individually controlled.

EASY-TO-USE SOFTWARE

The FTBx-2850 light sources are locally controlled using software. Using the software application, operators can easily control multiple lasers and its graphical interface allows for fast and easy access to the system status and control of lasers.

Users can control each laser individually, or control multiple lasers to create tilt over a wavelength range and automatically spread the lasers over the entire C band for example.



Unit view

SPECIFICATIONS^a

Wavelength tuning

C band

Operating wavelength range 1527.605 nm – 1568.772 nm

Operating frequency range 191.100 THz – 196.250 THz

L band

Operating wavelength range 1568.772 nm – 1611.787 nm

Operating frequency range 186.000 THz – 191.100 THz

Laser type Thermally tuned external cavity diode laser (ECDL)

Frequency tuning resolution (wavelength) 100 MHz (1 pm)^b

Tuning time < 30 s

Spectral characteristics

Linewidth (FWHM), instantaneous^d < 100 kHz

Side-mode suppression ratio 40 dB (55 dB typical)

Frequency uncertainty (wavelength) ± 2.5 GHz (± 22 pm)^{b,c}

Frequency stability (wavelength) ± 0.3 GHz (± 3 pm)^b over 24 hours

Optical power

Maximum optical output power
S: ≥ 12.5 dBm
H: ≥ 15 dBm (C-band only)

Minimum optical output power
S: ≤ 8 dBm
H: ≤ 11 dBm (C-band only)

Optical power uncertainty after calibration^e ± 0.6 dB

Power stability ± 0.1 dB over 24 hours (2 σ)

Output power tuning resolution 0.01 dB

Power flatness, peak-to-peak 0.5 dB over entire wavelength range

Fiber type Polarization maintaining fiber (PMF)

Polarization extinction ratio (PER) > 18 dB at the polarization maintained fiber output

Relative intensity noise RIN (for 13 dBm) -140 dB/Hz (10 MHz – 40 GHz)

Power monitoring Built-in

GENERAL SPECIFICATIONS

Size (H x W x D) 25 mm X 159 mm X 187 mm (1 in x 6 ¹/₄ in x 7 ⁵/₁₆ in)

Weight^f 0.5 kg (1.1 lb)

Temperature Operating 0 °C to 40 °C (32 °F to 104 °F)
Storage -40 °C to 70 °C (-40 °F to 158 °F)

Relative humidity 0 % to 80 % non-condensing

LTB-2/LTB-8 operation Windows 10, customized software only compatible with FTBx-2850 modules. ToolBox, EXFO Connect and Multilink are unavailable. Other FTBx modules are not compatible with this LTB-2/LTB-8 software configuration.

LTB-12 operation Windows 10, dedicated software only compatible with FTBx-2850 modules. Other FTBx modules are operated from ToolBox.

Remote control and automation Ethernet: SCPI commands or Web UI

LASER SAFETY



a. Specifications are valid at 23 °C \pm 3 °C.

b. Varies slightly according to wavelength.

c. Frequency uncertainty includes frequency linearity.

d. The laser uses a small FM dithering as part of its wavelength-locking mechanism. The instantaneous linewidth is measured with a 1-ms integration time.

e. At maximum output power.

f. Maximum weight for quad lasers; other configurations will be lighter.

ORDERING INFORMATION

FTBx-2850-1-XX-XX-XX-XX

Number of lasers

2 = 2 lasers
4 = 4 lasers

Wavelength band

C = C band
L = L band
CL = C&L band^a

Output power

S = Standard (12.5 dBm)
H = High (15 dBm)^b

Connector

EI-EUI-28 = UPC/DIN 47256, polarization maintained fiber output
EI-EUI-89 = UPC/FC narrow key, polarization maintained fiber output
EI-EUI-90 = UPC/ST (EI only), polarization maintained fiber output
EI-EUI-91 = UPC/SC, polarization maintained fiber output
EI-EUI-95 = UPC/E-2000, polarization maintained fiber output
EI-EUI-98 = UPC/LC, polarization maintained fiber output
EA-EUI-28 = APC/DIN 47256, polarization maintained fiber output
EA-EUI-89 = APC/FC narrow key, polarization maintained fiber output
EA-EUI-91 = APC/SC, polarization maintained fiber output
EA-EUI-95 = APC/E-2000, polarization maintained fiber output
EA-EUI-98 = APC/LC, polarization maintained fiber output

Example: FTBx-2850-1-2-C-S-EA-EUI-89

a. Available for 2 lasers configuration only.

b. Available for C-band models only.

EXFO headquarters T +1 418 683-0211 **Toll-free** +1 800 663-3936 (USA and Canada)

EXFO serves over 2000 customers in more than 100 countries. To find your local office contact details, please go to www.EXFO.com/contact.

For the most recent patent marking information, please visit www.EXFO.com/patent. EXFO is certified ISO 9001 and attests to the quality of these products. EXFO has made every effort to ensure that the information contained in this specification sheet is accurate. However, we accept no responsibility for any errors or omissions, and we reserve the right to modify design, characteristics and products at any time without obligation. Units of measurement in this document conform to SI standards and practices. In addition, all of EXFO's manufactured products are compliant with the European Union's WEEE directive. For more information, please visit www.EXFO.com/recycle. **Contact EXFO for prices and availability or to obtain the phone number of your local EXFO distributor.**

For the most recent version of this spec sheet, please go to www.EXFO.com/specs.

In case of discrepancy, the web version takes precedence over any printed literature.